

"Econo" Vertical Mixers


SVM series "Econo" vertical mixers are for powder and granule - like materials. They feature simple structure, fast mixing speed, easy for operation, maintenance and cleaning. It is mainly applied in plastic material mixing and also widely used in different industries, such as: powder metallurgy, pottery, chemical industry and food industry. It is an ideal mixing facility with five models, handling capacity ranging from 25 ~ 300kg.



SVM-100


Features

- Both mixing barrel and mixer are made of stainless steel and polished, so has a very high brightness, easy to clean and absolutely no material contamination.
- Mixing can be done in short period of time to save energy and has high performance.
- Auto stop device can be set within 0 ~ 300 hours.
- Material discharging outlet has a manual shut-off plate for easy material clearance.
- Both the body and its stand are fully welded to ensure solid structure.

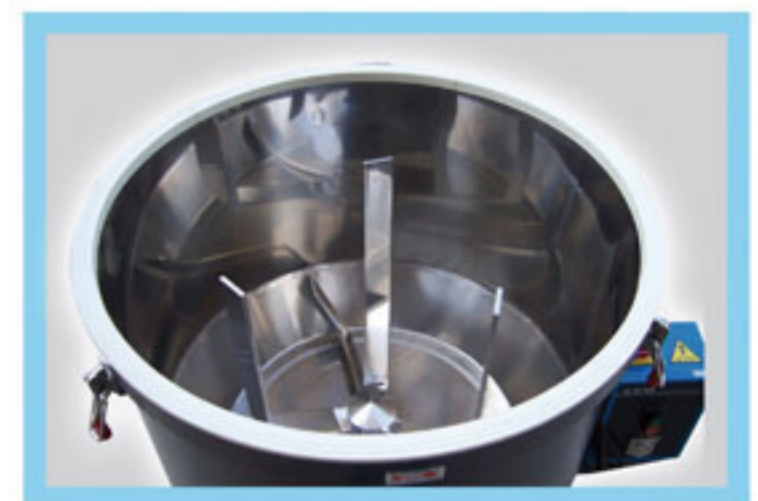

Barrel and Mixer

Outline Drawing

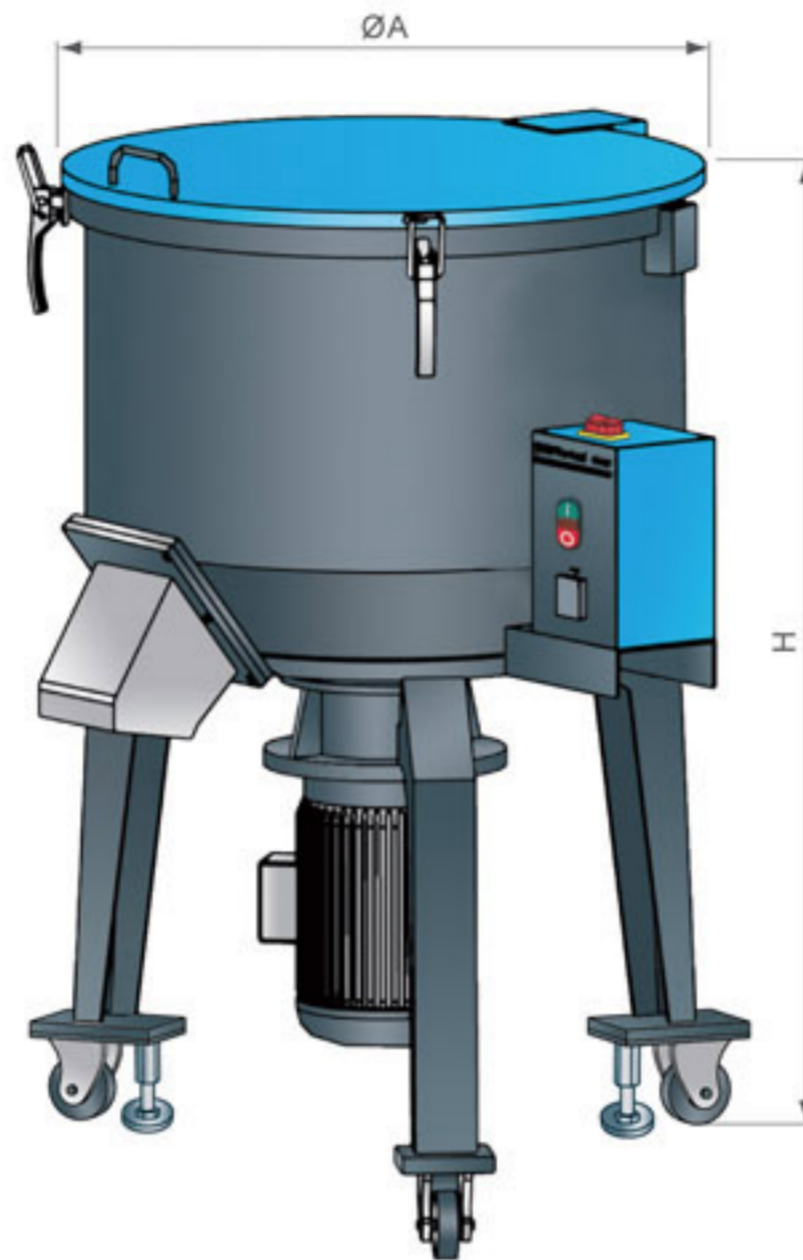

Specifications

Model	Motor Power (kW, 50 / 60Hz)	Rev (r.p.m.) (50 / 60Hz)	Mixing Capacity* (kg)	Dimension (mm) ØA × H	Weight (kg)
SVM-25	1.1 / 1.3	80 / 92	25	510 X 1040	90
SVM-50	1.5 / 1.8	80 / 92	50	650 X 1090	131
SVM-100	3.0 / 3.6	80 / 92	100	800 X 1300	201
SVM-150	4.0 / 4.8	80 / 92	150	910 X 1400	287
SVM-200	5.5 / 5.6	80 / 92	200	980 X 1600	368
SVM-300	7.5 / 8.6	80 / 92	300	980 X 1600	368

Note: 1) " * " Normal mixing time is 3 mins.
 2) Max. Noise Level is 70 dB (A).
 3) Max. mixing capacity is tested based on continuous processing material of 0.65 in density and 2 - 3 mm in size.
 4) Power supply 3Φ, 230 / 400 / 460 / 575V, 50 / 60Hz.

We reserve the right to change specifications without prior notice.

SHINI PLASTICS TECHNOLOGIES, INC.

Corporate Strategic Center
 Overseas Business Department:
 Dalang, Dongguan, Guangdong, China
 Tel: (0769) 8111 6600
 Fax: (0769) 8111 6611
 Email: shini@shini.com