


SHD-U

Hopper Dryer



Stainless steel
all working surfaces are water and other substances resistant

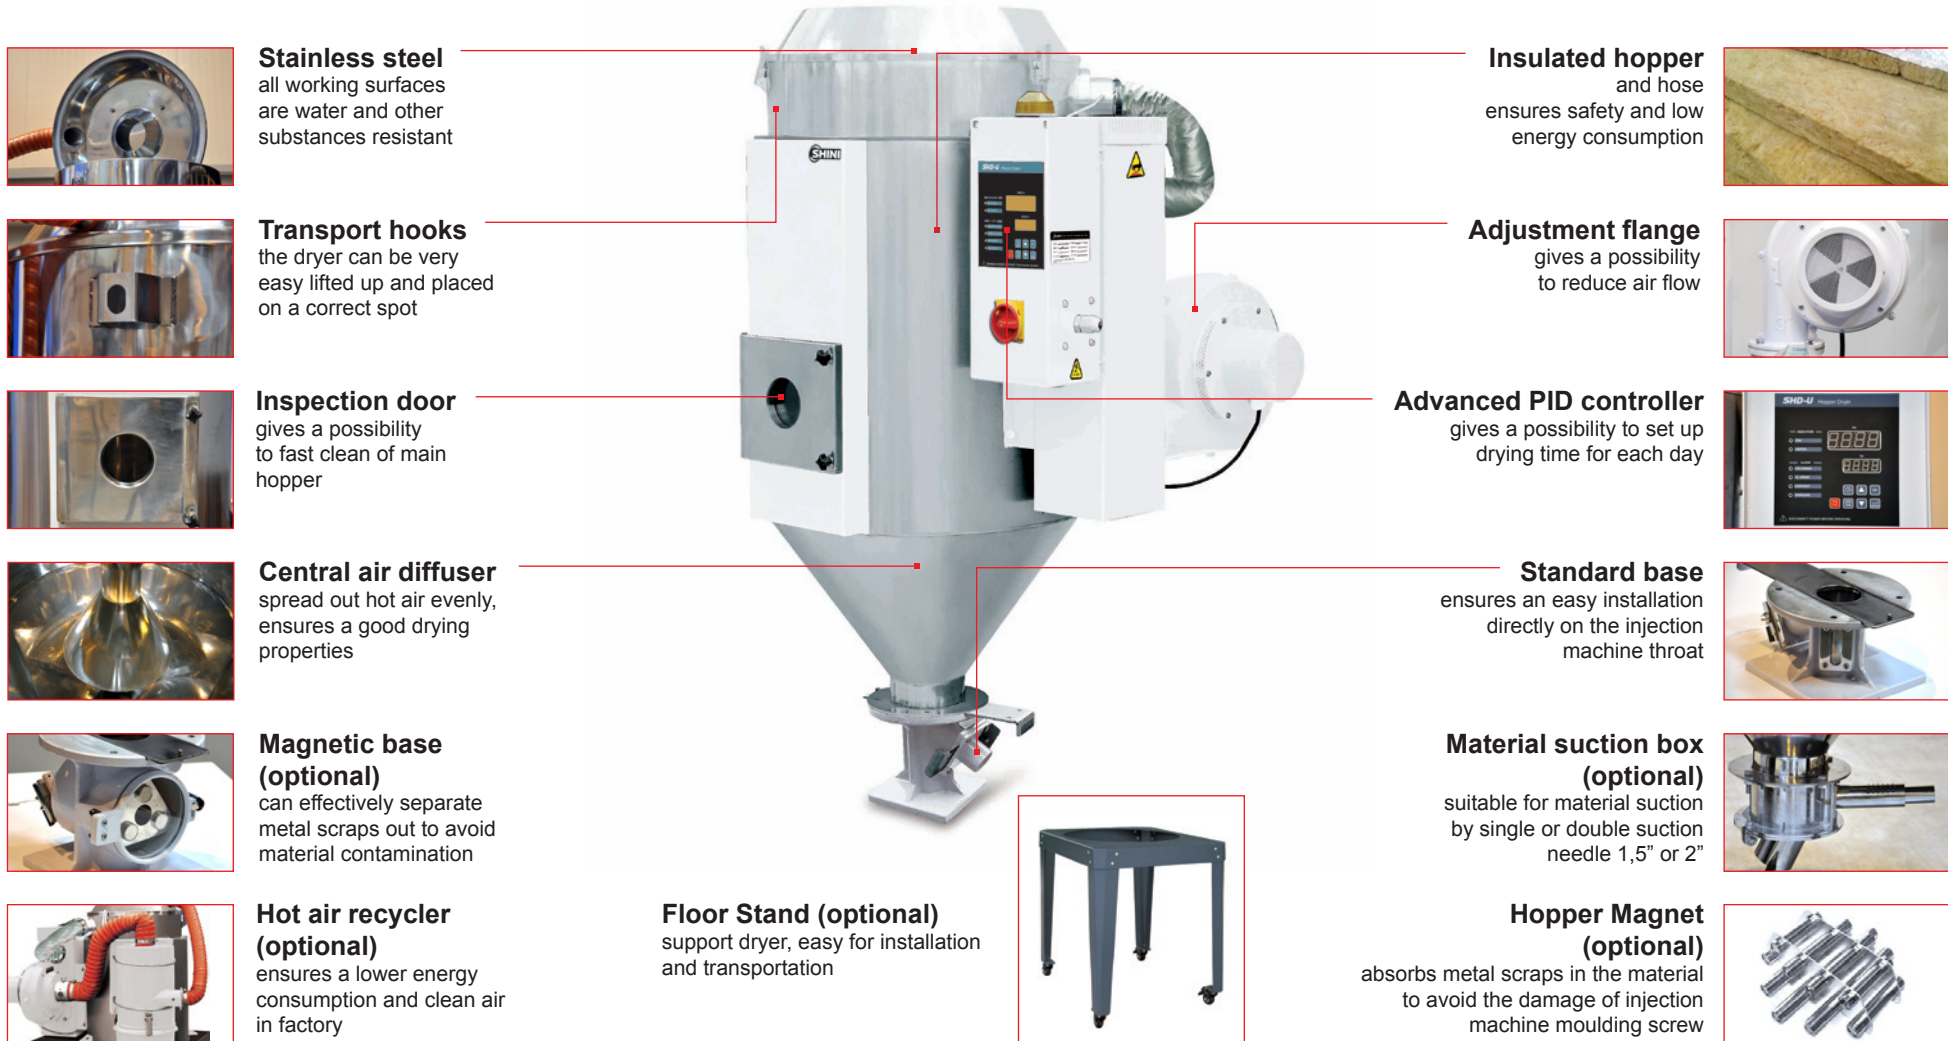

Transport hooks
the dryer can be very easy lifted up and placed on a correct spot



Inspection door
gives a possibility to fast clean of main hopper



Central air diffuser
spread out hot air evenly, ensures a good drying properties



Magnetic base (optional)
can effectively separate metal scraps out to avoid material contamination



Hot air recycler (optional)
ensures a lower energy consumption and clean air in factory

Floor Stand (optional)
support dryer, easy for installation and transportation



Insulated hopper
and hose ensures safety and low energy consumption



Adjustment flange
gives a possibility to reduce air flow



Advanced PID controller
gives a possibility to set up drying time for each day



Standard base
ensures an easy installation directly on the injection machine throat



Material suction box (optional)
suitable for material suction by single or double suction needle 1,5" or 2"



Hopper Magnet (optional)
absorbs metal scraps in the material to avoid the damage of injection machine moulding screw

